


Product-Specific INSTALLATION & TECH SPECS



PROFILE IDENTIFICATION AND DETAILED DRAWING

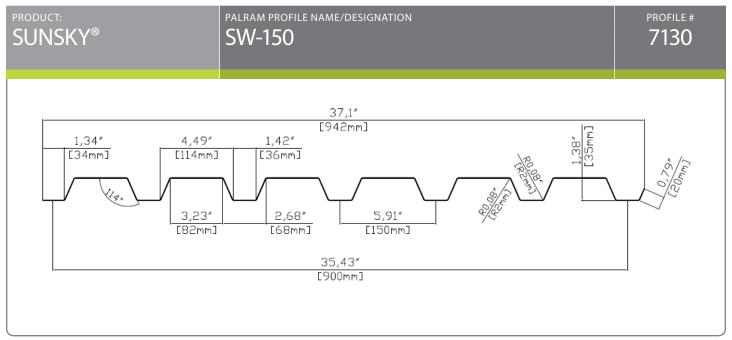

PROFILE DIMENSIONS

PRC	OFILE	THIC	(NESS	LENG	STH †	OVERALL WIDTH		NET COVERAGE AFTER OVERLAP		SIDE LAP
mm	inch	mm	inch	m	feet	mm	inch	mm	inch	%
150/35	5.91/1.38	0.8-1.5	.0306	1.5-11.8	5-39	942	37.1	900	35.43	5.4

† MAXIMUM RECOMMENDED PANEL LENGTH

m	feet
7	24

While it is technically possible to manufacture and ship the maximum length listed, Palram does not recommend exceeding the length shown at left in order to avoid significant issues related to thermal expansion and contraction.

MAXIMUM ROOF SPAN (INCHES)

	Load	.03" (0.8mm) thickness		.04" (1.0mm) thickness		.05" (1.2mm) thickness		.06" (1.5mm) thickness	
	(lb/ft²)	End Span	Mid Span						
	15	44	59	47	63	50	67	55	73
	20	40	53	43	57	46	61	49	65
	25	37	49	40	53	43	57	46	61
	30	34	45	37	49	40	53	43	57
	35	32	43	35	47	37	49	40	53
	40	31	41	34	45	35	47	38	51

NOTES ABOUT MAXIMUM ROOF SPANS

- The specified dimensions do not supersede the requirements of local construction codes.
- The given spans are according to deflections criterion of L/20, and minimum slope of 10%.
- The maximum roof spans are based on calculation model and practical testing.
- The mentioned load refers to wind and snow load only.
- For vertical application spans can be increased by 10%.

Continues on back side

PRODUCT: PALRAM PROFILE NAME (a.k.a. Designation) PROFILE #

SUNSKY® SW-150 7130

FASTENER AND WASHER SPECIFICATION FOR THIS PROFILE

Valley Fixing	Crest Fixing	Side Lap Stitching
Self-drilling ¼" (6mm) x 2" (50mm) screw with 19 mm diameter- galvanized / aluminum / stainless metal washer attached to EPDM rubber gasket of 55 to 65 shore hardness.	N/A for this profile.	1/4" (6mm) x 1"(25mm) self-tapping screw (Grommet seals) with EPDM seal or 19mm diameter self-tapping screw galvanized / aluminum / stainless metal washer attached to EPDM rubber gasket of 55 to 65 shore hardness.

FASTENING

- Apply sealing tape over the SUNSKY panel side-lap corrugation crests, where covered by the next panel.
- Apply sealing tape along the bottom and top end-lap (if there is one), along screw center line or two tapes on both sides of screw center line.
- Pre-drill 3/8" holes where screws are positioned.
- Fasten the screws according to the fastening illustrations below, starting from the first side-lap through, the pre-drilled holes.
- Figure 1: End Purlin fastening schedule.
- Figure 2: Intermediate Purlin fastening schedule.
- Figure 3 & 4: Side Lap Stitch Screw at purlin (Fig. 3) and in between purlins (Fig. 4) so that 12-16 inch spacing can be achieved.






DO NOT OVER-TIGHTEN!


Washers should be perpendicular to purlin, and tightened to the point where they are firmly seated, but not bulging.

FASTENER LOCATIONS FOR THIS PROFILE

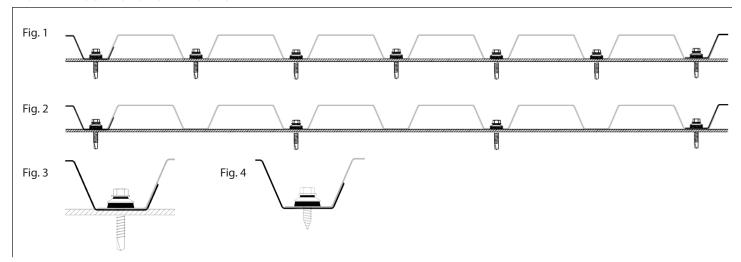

PANEL OVERLAP AND OVERHANG

- Recommended longitude overlap of 8" above purlin.
- Each panel to extend 4" over the fixings line on the purlin.
- Panels should overhang a minimum of 2 inches and maximum 6 inches beyond the row of fasteners.



CURVED ROOF APPLICATIONS

Minimum curving radius 17 feet

