



SUNLITE® Plus

Multiwall Polycarbonate Sheet with Anti-Condensation



AGRICULTURE



CONSTRUCTION



Overview

SUNLITE Plus combines high light transmission, excellent weather resistance and a special anti-drip feature needed for plant growth or humid public areas such as swimming pools.

The tough multiwall polycarbonate structure and low weight reduce the cost of the supporting structure. Shatterproof polycarbonate coupled with integrated UV resistant co-extruded layer yields long service periods backed up by a 10 year limited warranty.

SUNLITE Plus provides an optimal cultivation environment for agricultural greenhouses. The sheet blocks ultraviolet rays that burn plants and living tissues while transmitting high percentage of natural daylight.

www.palram.com

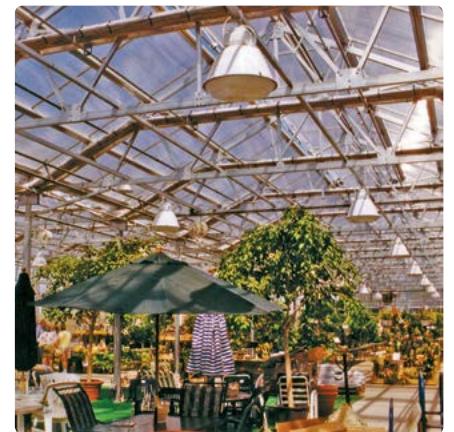
Main Benefits

- Built-in condensation control
- Reduces the harmful effects of dripping
- More light transmission during cold periods
- Transparent - Up to 80% light transmission
- Co-extruded UV protection on one or both sides
- Blocks out UV radiation
- High thermal insulation
- Impact resistant - Virtually unbreakable
- Lightweight
- Easy to work with and install



Typical Applications

- Greenhouses
- Garden centers
- Swimming pools







Build On.

Product Availability*

Colors	Clear, White Opal, Solar Control*, Solar Ice*
UV Protection	SUNLITE Plus: UV protection on one side SUNLITE Plus UV2: UV protection on both sides
Width	980, 1050, 1220, 1250, 1830, 2100 mm
Length	2000 - 12000 mm
Structures	See table below

*Other specifications are available subject to a minimum order quantity. Other available structures and thicknesses are listed in the SUNLITE leaflet.

Structures

Structures	Light Transmission (Clear)	U Value (W/m ² K)	Drawing
Twin Wall 6mm	80%	3.5	
Twin Wall 8mm	80%	3.3	
Twin Wall 10mm	79%	3.0	
Triple Wall 8mm	77%	3.0	
Triple Wall 10mm	77%	2.7	
Triple Wall 16mm	76%	2.3	

Installation

Installation instructions for greenhouses appear in the "SUNLITE Plus Installation Instructions for Greenhouses" brochure, which is available on Palram's global website (www.palram.com). For more information on handling, installation and accessories please contact your Palram distributor.

Typical Physical Properties

Property	Method	Condition	Units	Value
Density	D-1505		g/cm ³	1.2
Heat deflection temperature (HDT)	D-648	Load: 1.82 MP	°C	135
Service Temperature - Short term			°C	-50 to +120
Service Temperature - Long term			°C	-50 to +100
Coefficient of linear thermal expansion	D-696		mm/m °C	0.065
Tensile strength at yield	D-638	10 mm/min	MPa	62
Elongation at break	D-638	10 mm/min	%	>80
Impact falling dart	ISO 6603/1		J	40-400
Thermal expansion/contraction rate			mm/m	3

*ASTM except where noted otherwise.

Flammability

SUNLITE Plus sheets are self-extinguishing and comply with the most demanding of international fire resistance standards defined in the field of plastics, as indicated by representative results in the attached table.

Method	Classification*
EN 13501	B, s1, d0
BS 476/7	Class 1
DIN 4102	B-1
NSP 92501	M-1, M-2
ASTM D-635	CC-1 (SUNLITE® SL)
ASTM E-84	Class A

* Classifications depend on sheet type and thickness. For more information please refer to your SUNLITE distributor.



02/2015 The data in this publication supersedes previous releases. For the latest update refer to our website: www.palram.com.au



PALRAM SA/NT
517A Cross keys Road
Cavan SA 5094
Tel: (08) 8262 2288
Fax: (08) 8262 3388
salessa@palram.com

PALRAM NSW/ACT
1 Cox Place
Glendenning NSW 2761
Tel: (02) 9757 3166
Fax: (02) 9756 1008
salesnsw@palram.com

PALRAM QLD
Unit 9C / 380 Bilsen Road
Geebung QLD 4034
Tel: (07) 3172 5581
Fax: (07) 3172 5516
salesqld@palram.com

PALRAM VIC/TAS
34 Buys Court
Derrimut VIC 3030
Tel: (03) 9219 4444
Fax: (03) 9219 4455
salesvic@palram.com

PALRAM WA
74 Christable Way
Landsdale WA 6065
Tel: (08) 9302 4173
Fax: (08) 9302 5287
saleswa@palram.com



In as much as Palram Industries has no control over the use to which others may put the material, it does not guarantee that the same results as those described herein will be obtained. Each user of the material should make his own tests to determine the material's suitability for his own particular use. Statements concerning possible or suggested uses of the materials described herein are not to be construed as constituting a license under any Palram Industries patent covering such use or as recommendations for use of such materials in the infringement of any patent. Palram Industries or its distributors cannot be held responsible for any losses incurred through incorrect installation of the material. In accordance with our company policy of continual product development you are advised to check with your local Palram Industries supplier to ensure that you have obtained the most up to date information.

©1998 Palram Industries Ltd. | SUNLITE is a registered trademark of Palram Industries Ltd.

